

EWIND 54-Port Managed PoE Switch.



Description

The EW-S2854GM-AP is a 10/100/1000M PoE fiber switch. It has 48*10/100/1000M PoE ports and 6*1/2.5/10G SFP slot ports, Port 1-48 can support IEEE 802.3af/at PoE standard, single port PoE power upto 30W, the maximum PoE output power is 800W. As a PoE power supply device, it can automatically detect and recognize the power receiving equipment that meets the standard and supply power through the network cable. It can supply power to POE terminal equipment such as wireless AP, webcam, VoIP phone, industrial sensor through network cable, and meet the network environment that needs high-density PoE power supply. It is suitable for intelligent transportation, rail transit, electric power, mining, metallurgy and green energy. Industrial scenes such as construction set up a cost-effective and stable communication network.

Features

- 48*1000M POE +6*1/2.5/10G SFP ports
- PoE Switch, 1-48 ports support IEEE802.3af/at;
- PoE port support AF/AT intelligent recognition. Standard power is 15.4W/port, Maximum power: 30W/port;
- Support AI Watchdog, Port self-healing, VLAN, extend 300meter distance, Auto Speed Change, Priority port & reduce the after-resale.
- PoE default: 1, 2(+)/3, 6(-)
- Operation TEMP:-20~55°C
- Input voltage: DC48-57V,
- IP protection level: IP40;
- 3 years warranty

Technical Data Sheet

TECHNICAL SPECIFICATION

Model	EW-S2854GM-AP
Interface	48*10/100/1000Base-T/TX PoE ports (Data/Power) 6*1/2.5/10G uplink SFP+ fiber slot ports (Data) 1*Console RS232 port (115200, N,8,1)
Network Management Type	L2+
POE Port	Port 1-48 can support IEEE 802.3af/at PoE standard
Network Protocol	IEEE802.3 10BASE-T; IEEE802.3i 10Base-T; IEEE802.3u 100Base-TX; IEEE802.3ab 1000Base-T IEEE802.3z 1000Base-X IEEE802.3ae 10GBase-SR/LR IEEE802.3x
PoE Standard	IEEE802.3af/at
Ethernet Port Feature	Port 1-48 can support 10/100/1000BaseT(X) auto detect, full/half duplex MDI/MDI-X adaptive
Fiber Port Feature	1G/2.5G/10G SFP fiber interface (Fiber module is not included, need to order separately, module options include single/multi-mode, single/dual fiber, LC)
Forwarding Mode	Store and Forward
Switching Capacity	216Gbps (non-blocking)
Forwarding Rate	210.94Mpps
MAC	32K
Buffer Memory	32M
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤100 meter); 100BASE-TX: Cat5 or later UTP (≤100 meter) 1000BASE-T: Cat5e or later UTP (≤100 meter)
Optical Fiber Cable	Multi-mode: 850nm 0~300M(10G),850nm 0~500M (1.25G); Single-mode:1310nm 0~40KM,1550nm 0~120KM.
Power Supply Pin	Default: 1/2(+),3/6(-)
Max / Average Power Per Port	30W/15.4W
Total PWR / Input Voltage	800W (AC100-220V)



Technical Data Sheet

Power Consumption	Standby<15W; Full Load<800W
Power Supply	Built-in power supply, AC 100~220V 50-60Hz
LED Indicator	Power indicator: PWR (Green); Network indicator: 1-48(Link/Act)/ (Orange),49-52(Link/Act)/ (Green); POE indicator: PoE (Green) SYS:(Green)
Reset Switch	Yes, One-button factory reset
Operation TEMP/Humidity	-20~+55°C;5%~90% RH Non condensing
Storage TEMP /Humidity	-40~+80°C;5%~95% RH Non condensing
Protection	IEC61000-4-2(ESD): ±8kV contact discharge, ±15kV air discharge IEC61000-4-5(Lightning protection/Surge): Power:CM±4kV/DM±2kV; Port: ±4kV
Protection Level	IP30
Dimension (L*W*H)	440*290*44.5mm
Net /Gross Weight	<4.9kg / <5.8kg
Installation	Desktop, 19-inch 1U cabinet
Lightning protection / protection level	Lightning protection: 4KV 8/20us; Protection level: IP30
Certification	CCC, CE mark, commercial; CE/LVD EN60950; FCC Part 15 Class B; RoHS;UKCA
Warranty	3 years, lifelong maintenance.

Managed Series Feature

Interface	IEEE802.3x flow control (full duplex) Broadcast storm suppression for port rate support speed limit for incoming and offline message traffic, with a minimum particle size of 64Kbps. Temperature protection setting Energy saving configuration of port IEEE Ethernet
PoE Management	Total power limit of PoE power supply PoE output power allocation per port, close /af/at PoE output priority configuration for each port PoE working state display per port Power delay start PoE work and time scheduling
Layer3 Function	Support L2+ managed function, Support IPV4/IPV6 management Support layer3 soft routing (weak three tier) forwarding, Support different network segments, communication between different VLAN Support static routing / default routing 128, 1024 ARP software forwarding
VLAN	Support port based VLAN (4K), IEEE802.1q Support protocol based VLAN Support Access, Trunk, Hybrid three types of port configuration




Technical Data Sheet

	Support QinQ configuration
Port Aggregation	Support LACP Support static polymerization Support the largest 8 aggregation groups, each aggregation group supports 8 ports.
Spanning Tree	STP (IEEE802.1d) RSTP (IEEE802.1w) MSTP (IEEE802.1s)
Industrial Ring Network Protocol	Support G.8032 (ERPS), support 255 loops at most, and supports 1024 devices per ring. The self-healing time of the ring network is less than 20ms
Multicast	Support IGMP Snooping V1/V2 and support 1024 multicast groups at most. Support the user's quick departure mechanism Support MLD Snooping V1/V2 Support multicast VLAN
Image	Bi-directional traffic mirroring supporting the basic port
QoS	Diff-Serv QoS Each port supports 8 output queues Support 802.1p/DSCP priority mapping Support queue scheduling mechanism (SP, WRR, SP+WRR) priority tag Mark/Remark stream based packet filtering Support for stream-based redirection Support flow-based speed limit
ACL	Support L2 to L4 packet filtering function, can match the first 80 bytes of the message, provide based on the source MAC address, destination MAC address, source IP address, destination IP address, IP protocol type, TCP/UDP port, TCP/UDP port range, VLAN and other definition ACL. Support ACL based on port and VLAN
Safety Characteristics	Support user grading management and password protection Support IEEE802.1X authentication / centralized MAC address authentication Support AAA&RADIUS authentication Support the number of MAC address learning restrictions Support MAC address black hole Support SSH 2 to provide secure passwords for user login. Support SSL to ensure data transmission security Support port isolation Support the speed limit function of ARP message Support IP source address protection Support ARP intrusion detection function Support against DoS attacks Support port broadcast message suppression Support host data backup mechanism Binding capabilities of IP+MAC+VLAN+ ports
DHCP	Support DHCP Client Support DHCP Snooping Support DHCP Serve Support DHCP Relay
Management and Maintenance	Support Console/AUX Modem/Telnet/SSH2.0 CLI command line configuration Support WEB network management (HTTPS) Support FTP, TFTP, Xmodem, SFTP file download management

Technical Data Sheet

	Support SNMP V1/V2C/V3 Support one bond reduction Support NTP clock Support system work log Support Ping detection Support cable state detection Support CPU instant utilization status view Support link layer discovery protocol LLDP
System Requirements	Web browser: Mozilla Firefox 2.5 or higher, Google browser chrome V42 or higher, Microsoft Internet Explorer10 or later; Cat5e or later Ethernet cable; TCP/ IP, network adapter and network operating system (Microsoft Windows, Linux or Mac OS X) installed on on every computer in the network.

DIMENSION

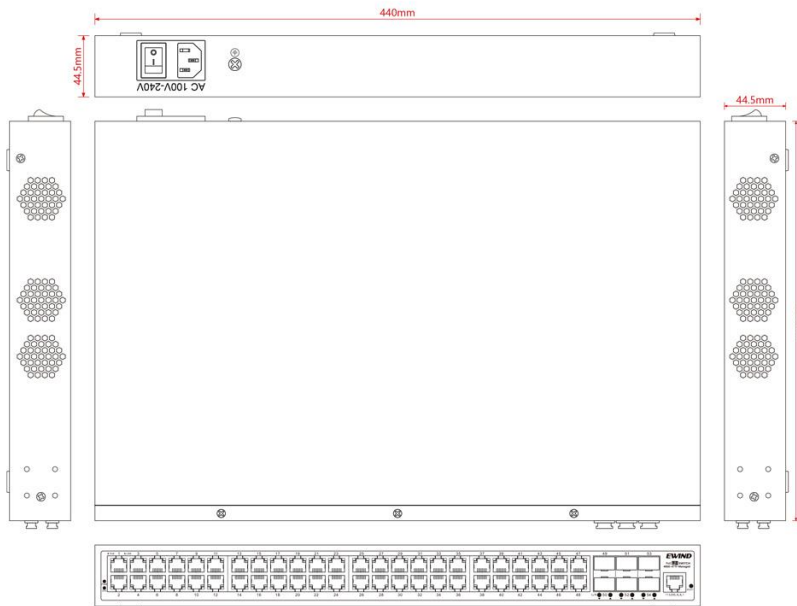

Technical Data Sheet



PACKING LIST

CONTENT	QTY	UNIT
54 Ports Gigabit Uplink Managed PoE Fiber Switch (EW-S2854GM-AP)	1	SET
User Guide	1	PC
Warranty Card	1	PC



EWIND TECHNOLOGIES CO.,LIMITED

Factory Address: 3Floor,Blk 2,Da Bao Road West,33 Region,Bao An Area,Shenzhen,China.

Website: www.ewindnet.com.

Copyright© 2019-2025 Shenzhen Ewind Technology Co.,Ltd. | All Rights Reserved