

4 Port 1000M PoE Switch With IP66 Waterproof

3*GE RJ45 PoE Switch+1*GE RJ45 Port

EWIND



- 3*1000M RJ45 Port PoE Switch+1*1000M RJ45 LAN port,1-3 ports support af/at;
- Input: 1* DC connector + 1*1000M LAN data port
- Output: 3*1000M RJ45 POE port;
- PoE port support AF/AT intelligent recognition. Standard power is 15.4W/port, Maximum power: 30W/port;
- Switching capacity: 12Gbps, MAC table:8K;
- 3 years warranty.

RoHS **FC** **CE**

Introduction

The EW-IP8804CG-3GE is an outdoor rated switch special designed for exterior, complex backhaul and networking applications, enclosed in an IP66 Reflective Aluminum alloy case with a sealing that gasket

Passes tension, bearing, corrosion and test, pass salt spary resistance test.

There are 1 LAN port and 3 POE output ports with 6kv surge protections, each POE output port provides 30W(MAX) power for remote PDs at 10/100/1000Mbps of datasheet speed.

TECHNICAL SPECIFICATION

Model	EW-IP8804CG-3GE
Fixed Port	3*10/100/1000M Base-TX PoE ports (Data/Power) 1*10/100/1000M Base-T Uplink RJ45 ports (Data) 1*DC input
POE Port	Port 1-3 support PoE
Network Protocol	IEEE802.3 10BASE-T; IEEE802.3i 10Base-T; IEEE802.3u 100Base-TX; IEEE802.3ab 1000Base-T; IEEE802.3x


Ethernet Port Feature	10/100Base-T(X) 10/100/1000 Base-T automatic detection, full/half Duplex MDI/MDI-X adaptive
Fiber Port Feature	Store and Forward (Full Wire Speed)
Switching Capacity	12Gbps
Forwarding Mode	8.93Mpps
MAC	8K
Buffer Memory	2M
Twisted Pair Transmission	10BASE-T:Cat5 UTP(≤250 meter) 100BASE-TX:Cat5 or later UTP(≤100 meter) 1000BASE-TX:Cat5 or later UTP(≤100 meter)
Power Supply Pin	Default 1/2(+), 3/6(-); Optional 4/5(+), 7/8(-)
MAX / AVERAGE Power Per Port	30W/15.4W
Operation TEMP / Humidity	-20~+55°C;5%~90% RH non condensing
Storage TEMP / Humidity	-40~+75°C;5%~95% RH non condensing
Dimension	240*177*53mm
Net /Gross Weight	1.8kg
Installation Method	desktop type ,wall mounted
Port lightning protection / level	Port lightning protection : 4KV 8/20us; Protection level: IP66
Certification	CCC;CE mark, commercial;CE/LVD EN60950; FCC Part 15 Class B;RoHS

Product Dimension



Front view

- 1. DC Power Input port
- 2. Data & Power Output port
- 3. Data & Power Output port

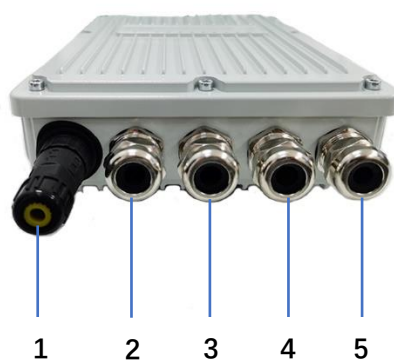

Bottom view

- 4: Data & Power Output port
- 5: LAN: Data input port
- 6: Mounting Hole



Top view



6

Back view



Left view



Right view

PACKING LIST

CONTENT	QTY	UNIT
4 Ports 1000M PoE Switch with IP66 Waterproof (EW-IP8804CG-3GE)	1	SET
User Guide	1	PC
Warranty Card	1	PC